


## Key Features:

- H.264 Main Profile Hardware Compression.
- Support dual-stream transmission for all channels.
- Support 1 SATA HDD.
- Video Input/Output: BNC 4 CH In / 1 CH Out / VGA 1 CH Out.
- Audio Input/Output: RCA 4 CH In / 1 CH Out.
- Hexaplex Operation simultaneously: Preview, Recording, Playback and Network Live, Backup.
- Mobile phone surveillance (WIN Mobile / Android / Symbian / iPhone / Blackberry).
- Support Mouse and Remote Controller.
- Dimensions (L x W x H): 246.5 mm x 199 mm x 51.5 mm, Weight: 2.1 kg.

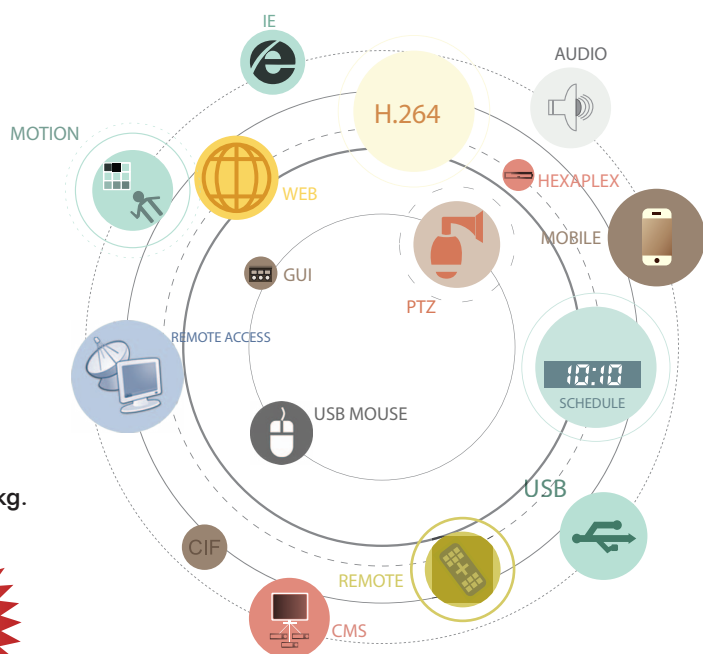

## Specifications:

Model		TE4DXRZB	TE8DXRZB	TE16DXRZB
System	Operating System	Embedded LINUX		
	System Resources	Pentaplex function: live, recording, playback, backup & remote access		
Interface	Operation Interface	GUI, on-screen menu tips		
	Display Interface	1/4	1/4/8/9	1/4/8/9/16
Video	Video Standard	PAL 625 Lines, 50f/s, NTSC 525 Lines, 60f/s		
	Video Recording	H.264 Main profile		
	Playback Resolution	PAL:CIF (352x288):NTSC:CIF (352x240) (Real Time)		D1:PAL 1fps-25fps NTSC 1fps-30fps
	Encode Capacity	100/120 fps(D1)	400/480fps(CIF)	
	Motion Detection	Zones:396(22*18) detection zones, Sensitivity: 1-6(6 is the highest) Trigger recording, PTZ movement, tour, alarm, email, snapshot & FTP		
Audio	Audio compression	G711A		
	Bi-directional Talk	Support		
Record & Playback	Recording mode	Manual, Alarm, Video Detection, Continuous		
	Playback	Multi channels playback simultaneously, pause, stop, rewind, fast play, slow play, next file, previous file, repeat, shuffle, backup selection		
	Search Mode	Time, Date, Alarm, Motion Detection and exact search		
Storage & Backup	Space Occupation	Audio 28.8 MB/H, Video 25-450 MB/H		
	Record Storage	Local Hard Disk, Network		
	Backup Mode	Network download/USB Flash Disk/Movable HDD		
Interface	Video Input	<b>4CH</b>	<b>8CH</b>	<b>16CH</b>
	Video Output	1 Channel BNC Output, 1 Channel High Definition, VGA Output		
	Loop Output	N/A		
	SD Card	N/A		
	Audio Input	4 Channel		
	Audio Output	1 Channel		
	Alarm Input	N/A		
	Alarm Output	N/A		
	Net Interface	RJ-45 (10M/100M)		
	PTZ Control	<b>1RS485</b>		
	USB Interface	2 X USB2.0		
	Hard Disk	1 SATA HDD (Max 1*2048G)		
Environment	Power Supply	<b>12V2A</b>		
	Power Consumption	<10W(Hard Disk not included)		
	Working temperature	-10° C+55° C		
	Working Humidity	10%-90%		
	Atmosphere Pressure	86kpa-106kpa		
	Dimensions	246.5*199*51.5mm		
	Weight	2.1 kg		